

SAMSUNG

Completion of professional security 19" LED Monitor



19" LED Monitor

SMT-1914

- Supports up to 1280 x 1024 resolution, 4:3 display
- High contrast ratio 1000:1
- Fast response time 5ms
- Durable tempered glass screen

19" LED Monitor

SMT-1914




Specifications

SMT-1914		
Display		
Type	LED	
Screen Size	19"	
Brightness	250cd/m ²	
Max. Resolution	1,280 x 1024	
Contrast Ratio	1,000 : 1	
Aspect Ratio	4 : 3	
Viewing Angle (H/V)	170° / 160°	
Display Color	16.7million	
Response Time	5ms	
Panel Life	30,000 hours	
Interface		
RGB Connector	1 Analogue RGB 15-pin D-sub	
Input Signal	0.7 Vp-p ±5%	
On Screen Display		
Functions	VESA™ DPM compatible	
Language	English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Taiwanese, Chinese, Japanese, Korean	
General		
Electrical	Input Voltage	AC 100 ~ 240V (50/60Hz)
	Power Consumption	Max. 35W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Humidity	20% ~ 90% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	412 x 406.5 x 217.4 mm (16.22"x 16" x 8.56")
	Dimensions without Stand (WxHxD)	412 x 347 x 59.4 mm (16.22"x 13.66" x 2.34")
	Weight	5 kg (11.02lb)
	LCD Protection Glass	Yes
	Cabinet Color	Black
VESA Mounts Interface	100 x 100mm	

Dimensions

Unit : mm (inch)

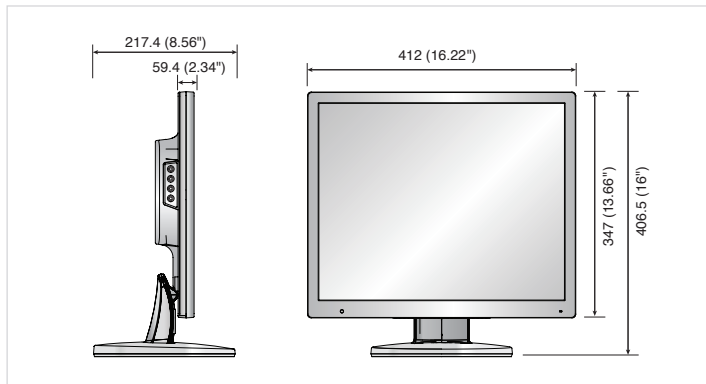


The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

■ DISTRIBUTED BY



+86-22-23887788

M.E-1206