

SAMSUNG

Completion of professional security 21.5" LED Monitor



21.5" Wide LED Monitor

SMT-2232

- Supports up to 1920 x 1080 resolution, 16:9 display
- Superior image quality DNIe (Digital Natural Image engine)
- High contrast ratio 1000:1
- 120Hz processing smooth judder in motion
- Fast response time 5ms
- Durable tempered glass screen

21.5" LED Monitor

SMT-2232




Specifications

SMT-2232		
Display		
Type		LED
Screen Size		21.5"
Brightness		250cd/m ²
Max. Resolution	VGA(D-SUB)	1,920 x 1,080
	BNC(CVBS)	600TVL
Contrast Ratio		1,000 : 1
Aspect Ratio		16 : 9
Viewing Angle (H/V)		170° / 160°
Display Color		16.7million
Response Time		5ms
Video System		NTSC / PAL
Panel Life		30,000 hours
Filter Type		3D combfilter
Interface		
Video	Connector	BNC types (2 in / 2 out)
RGB	Connector	1 Analogue RGB 15-pin D-sub
	Input Signal	0.7 Vp-p ±5%
HDMI	Connector	1 HDMI input (Type A connector)
Audio	Connector	2 RCA type (2 Stereo inputs)
	Output Signal	Speakers : 2 x 1W
Application Support		Remote controller
On Screen Display		
Functions		VESA™ DPM compatible
Language		English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Taiwanese, Chinese, Japanese, Korean
General		
Electrical	Input Voltage	AC 100 ~ 240V (50/60Hz)
	Power Consumption	Max. 35W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Humidity	20% ~ 90% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	515 x 391.8 x 217.4 mm (20.28" x 15.43" x 8.56")
	Dimensions without Stand (WxHxD)	515 x 316 x 59.9mm (20.28" x 12.44" x 2.36")
	Weight	5 kg (11.02lb)
	LCD Protection Glass	Yes
	Cabinet Color	Black
	VESA Mounts Interface	100 x 100mm

Dimensions

Unit : mm (inch)

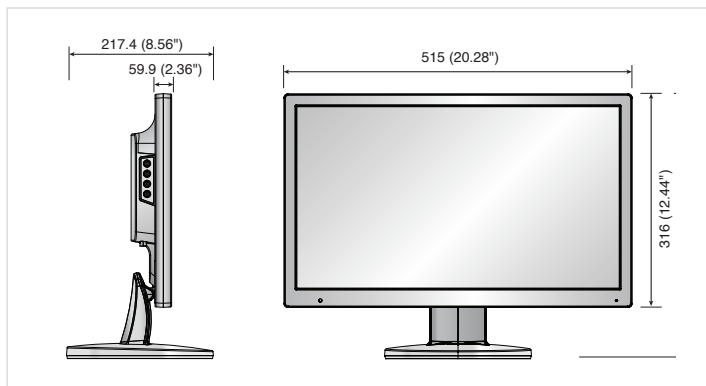

Design and specifications are subject to change without notice.



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

■ DISTRIBUTED BY

