

SMT-2731

27" Wide LED Monitor




Key Features

- Support up to 1,920 x 1,080 resolution
- Contrast ratio 1,000 : 1
- Fast response time 5ms
- Video input : HDMI, VGA, BNC

Dimensions

Unit : mm (inch)

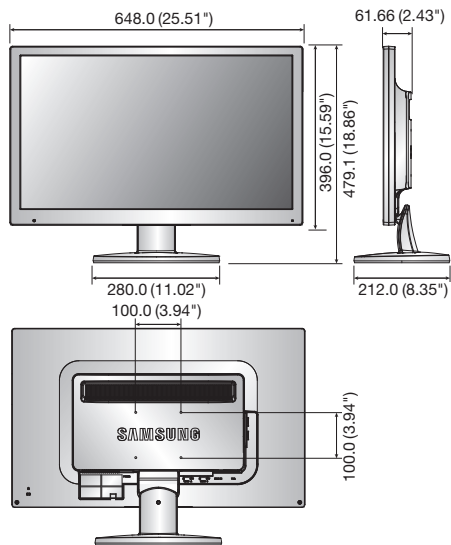

SMT-2731

DISPLAY	
Type	LED
Screen Size	27"
Max. Resolution	1,920 x 1,080
Brightness	300cd/m ²
Contrast Ratio	1,000 : 1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	170° / 160°
Display Color	16.7million
Response Time	5ms
Video System	NTSC / PAL
Panel Life	30,000 hours
Filter Type	3D combfilter
INTERFACE	
Video	Connector BNC type (2 in / 2 out)
	Connector 1 Analog RGB 15-pin D-sub
	Input Signal 0.7Vpp ±5%
VGA	Available Format 640 x 350@70Hz 720 x 400@70Hz 640 x 480@60Hz/72Hz/75Hz (VGA) 800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA) 1,024 x 768@60Hz/70Hz/75Hz (XGA) 1,152 x 864@75Hz 1,152 x 870@75Hz 1,280 x 960@60Hz 1,280 x 1,024@60Hz/75Hz (SXGA) 1,360 x 768@60Hz 1,600 x 1,200@60Hz 1,920 x 1,080@60Hz
HDMI	Connector 1 HDMI input (Type A connector)
	Available Format 640 x 480p@60Hz, 720 x 480i@60Hz, 720 x 480p@60Hz 720 x 576i@50Hz, 720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz 1,920 x 1,080i@50Hz/60Hz, 1,920 x 1,080p@50Hz/60Hz
Audio	Connector 2 RCA type (2 stereo inputs)
	Output Signal Speakers : 2 x 1W
Application Support	Remote controller
ON SCREEN DISPLAY	
Functions	VESA™ DPM compatible
Language	English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Thai, Chinese, Japanese, Korean, Dutch, Danish, Arabic
GENERAL	
Electrical	Input Voltage 100 ~ 240V AC (50/60Hz)
	Power Consumption Max. 39.5W
Environmental	Operating Temperature 0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity 0% ~ 90% (Non-condensing)
	Dimensions with Stand 648.0 x 479.1 x 212.0mm (25.51" x 18.86" x 8.35")
	Dimensions without Stand 648.0 x 396.0 x 61.66mm (25.51" x 15.59" x 2.43")
Mechanical	Weight 7.28Kg (16.05 lb)
	Protection Glass Yes
	Cabinet Color Black
	Rack Mounts Optional
	VESA Mounts Interface 100 x 100mm (3.94" x 3.94")